
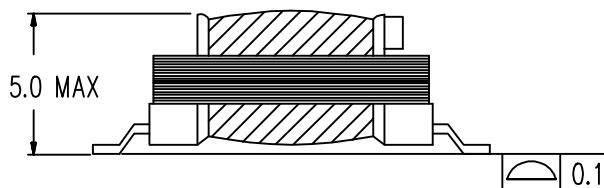


“●” PHASE POINT

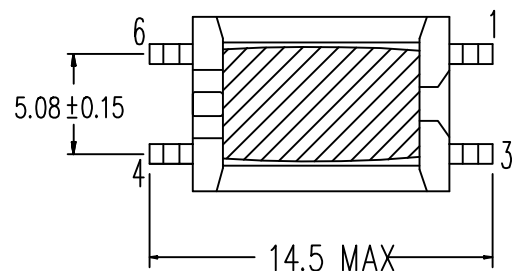

ELECTRICAL CHARACTERISTICS:

1.DCR:

PIN1-3=48 OHM±10%

PIN4-6=42 OHM±10%

2.INDUCTANCE:250Hz,0.5Vrms

(PARALLEL) PIN1-2=1.5 H MIN

3.IMPEDANCE:1KHz,0dBm

4-6W/H 600 OHM LOAD

PIN1-3=600 OHM±10%

4.INSERTION LOSS=1.0dB MAX

AT 1KHZ 0dBm W/H600 OHM LOAD

5.RETURN LOSS:300HZ=20dB MIN

1KHZ=23dB MIN 4KHZ=23dB MIN

6.TURNS RATIO:250Hz,0.5Vrms

PIN1-3:6-4=1.0±2%

7.HI-POT:

1250Vac 1mA 2sec Pri - Sec

8.ROHS COMPLIANT

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
POTS TRANSFORMER

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT4006

SACLE
1:1

REV
A0

$x \pm 0.35$
 $.x \pm 0.30$

$x^\circ \pm 3.0^\circ$
 $.x^\circ \pm 2.0^\circ$

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



$.xx \pm 0.25$
 $.xxx \pm 0.10$

$.xx^\circ \pm 1.5^\circ$
 $.xxx^\circ \pm 1.0^\circ$

DESIGND BY:
Sunny.Xu