



“●” PHASE POINT

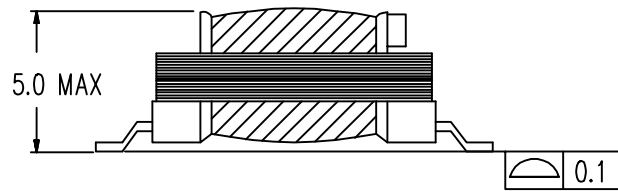

ELECTRICAL CHARACTERISTICS:

- 1.DCR:
 - PIN1-3=48 OHM±10%
 - PIN4-6=42 OHM±10%
- 2.INDUCTANCE:250Hz,0.5Vrms
(PARALLEL) PIN1-2=1.5 H MIN
- 3.IMPEDANCE:1KHz,0dBm
 - 4-6W/H 600 OHM LOAD
 - PIN1-3=600 OHM±10%
- 4.INSERTION LOSS=1.0dB MAX
AT 1KHZ 0dBm W/H600 OHM LOAD
- 5.RETURN LOSS:300HZ=20dB MIN
1KHZ=23dB MIN 4KHZ=23dB MIN
- 6.TURNS RATIO:250Hz,0.5Vrms
PIN1-3:6-4=1.0±2%
- 7.HI-POT:
1250Vac 1mA 2sec Pri - Sec
- 8.ROHS COMPLIANT

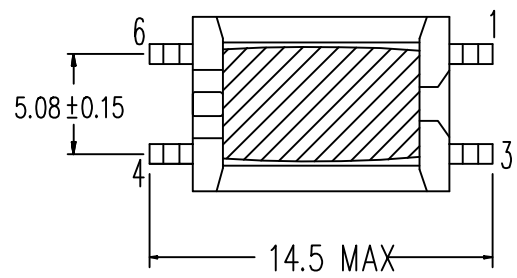

A	TITLE: Audio Transformer	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: WHTT4006	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
	REMARK:	SHEET 1/1		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu
TEL: +86 400 1048 018		WEB: WWW.WOHU-TEK.COM				