

APPROVED SHEET

CUSTOMER: _____

CUSTOMER P/N: _____

JWD P/N: S06808BA


REV: R0

DESCRIPTION: Transformer

Meet AEC-Q200 Standard

BMS Application

1CT: 1CT

CUSTOMER APPROVAL		COMPANY APPROVAL	
			
INSPECTED BY:		ISSUED BY:	Mingrui Song
CHECKED BY:		CHECKED BY:	/
APPROVED BY:		APPROVED BY:	Focus, Wang
APPROVED DATE:		ISSUED DATE:	2021/1/15

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)

四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

地址: 四川省绵阳市高新区永兴镇永兴工业园

ADD: YongXing Industrial of High-tech Zone In Mianyang City, Sichuan Province

TEL: +86-816-2561202 FAX: +86-816-2562518

E-MAIL: myjwd@myjwd.com

WEB: www.myjwd.com







四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

A. MECHANICAL(unit:mm)

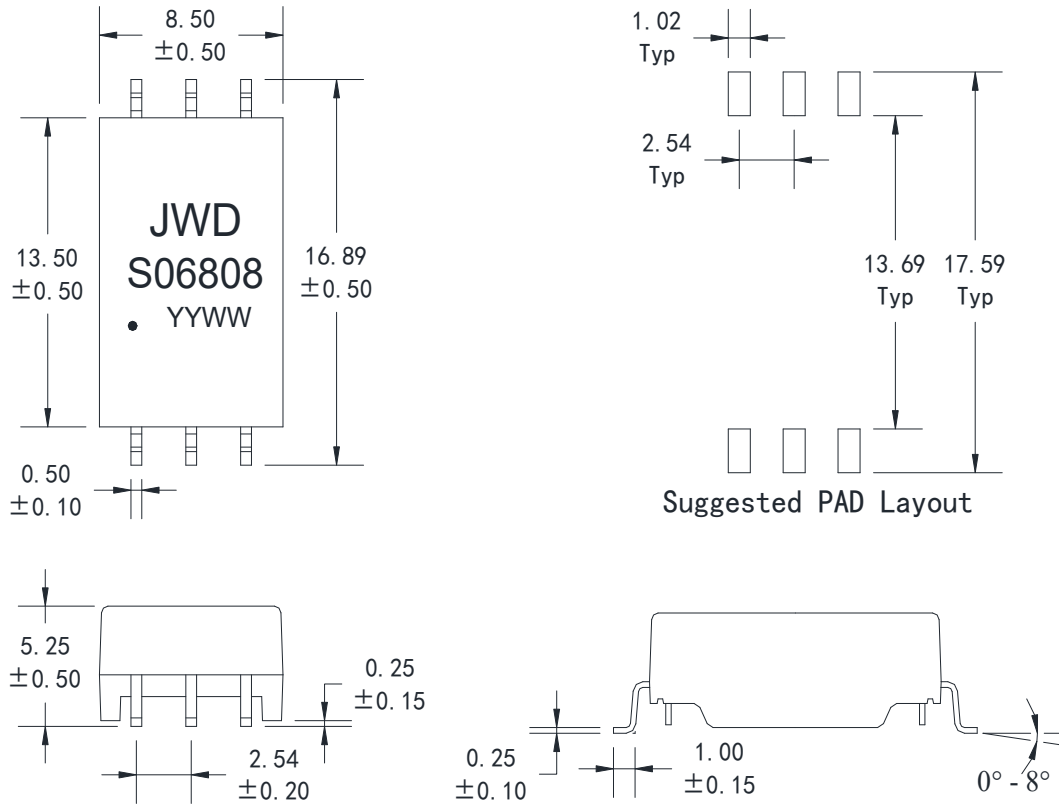

B. SCHEMATICS

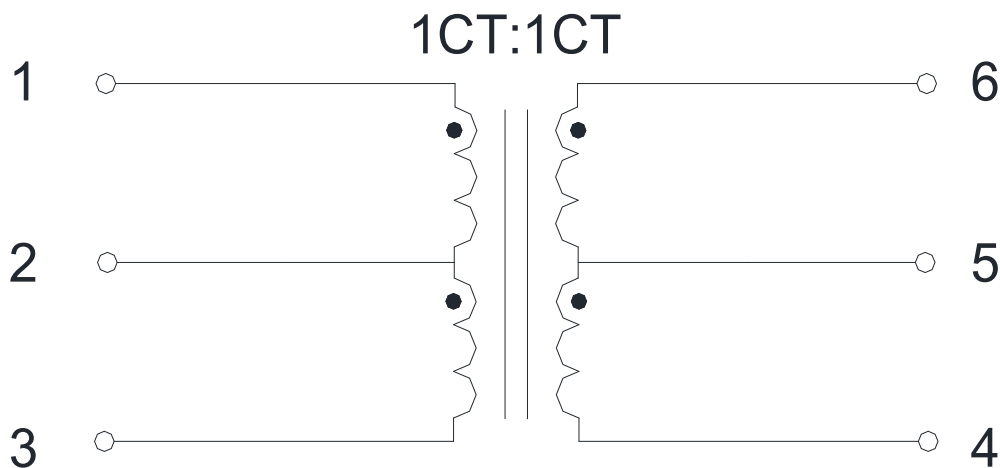

DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
Transformer	S06808BA		PAGE: 2/5



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

C. ELECTRICAL SPECIFICATIONS @25°C

1. OCL: 150uH min @100 KHz, 0.1V,(-40~+125°C)
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1000mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -0.5 dB Max @ 4 MHz
6. Return Loss: -20 dB Min @ 4 MHz
7. Isolation Hipot: 4300VDC 1mA 60s or 3700VAC 1mA 2s
8. Operating temperature -40°C to +125°C
9. Storage temperature -40°C to +125°C
10. Qualification: Meet AEC-Q200
11. RoHS compliant.

DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
Transformer	S06808BA		PAGE: 3/5