

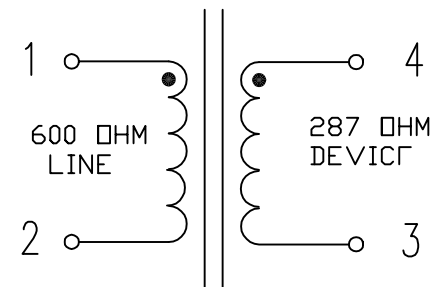

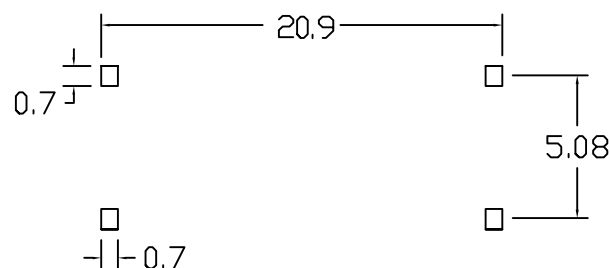
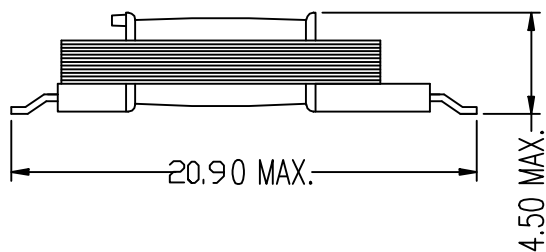


REACH & RoHS
COMPLIANT

1. Electric Characteristic & Dimensions (电气特性及尺寸) unit:mm

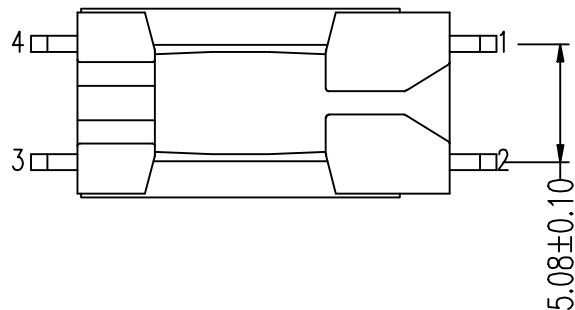

- ELECTRICAL CHARACTERISTICS:
- DCR:
 - PIN1-2=155 OHM ±10%
 - PIN3-4=144 OHM ±10%
 - INDUCTANCE:@1KHz,1Vrms LP
 - PIN1-2=3H MIN
 - INSERTION LOSS:
 - (@1KHz,0dB,PIN3-4 W/H287 OHM)
 - PIN1-2=3.5dB MAX
 - FREQ RESP(REF,1KHz):
 - @200Hz-4KHz=±0.3dB
 - RETURN LOSS(REF,600 OHM):
 - @200Hz-4KHz=20dB MIN
 - TURN RATIO:15KHz,1Vrms
 - PIN1-2:4-3=1±2%
 - T.H.D(@600Hz,-10dBm):
 - 82dB MAX
 - HI-POT:
 - 1650VAC 1mA 2SEC:P-S
 - ROHS COMPLIANT

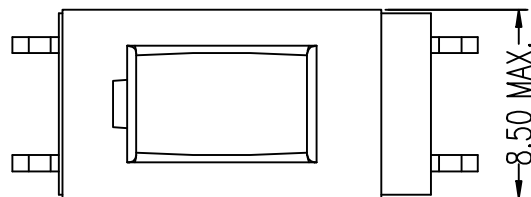

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
Audio Transformer

SIZE
A4
UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHTT4203

SACLE
1:1

REV
A0

x±0.35	x°±3.0°
.x±0.30	.x°±2.0°

CHECKED BY:
Elvis.Song

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:

SHEET
1/1



.xx±0.25	.xx°±1.5°
.xxx±0.10	.xxx°±1.0°

DESIGND BY:
Sunny.Xu